



WOOD BURNING STOVES  
FIREPLACE INSERTS  
ACCESSORIES

ROMOTOP spol. s r. o., Komenského 325, 742 01 Suchdol nad Odrou  
Czech Republic  
tel.: +420 556 770 911, +420 556 770 929, fax: +420 556 770 920  
www.romotop.com, info@romotop.cz

# FIREPLACE INSERTS WITH CENTRAL AIR INLET



**KV 055 A**



**KV 055 B**



**KV 055 R**



**KV 055 L**



**KV 075 01/02**



**KV 075 W**



**KV 025 N 01/02/03**



**KV 025 G 01/02**



**KV 025 F**



**KV 025 F P**



**KV 025 F R**



**KV 025 L**



**KV 025 M**

# FIREPLACE INSERTS WITH CENTRAL AIR INLET

## TECHNICAL SPECIFICATIONS

Model	Specification	Nominal output (kW)	Maximum output (kW)	Adjustable output (kW)	Power of water exchanger (kW)	Heating area (m <sup>2</sup> )	Efficiency (%)	Draught (Pa)	Weight (kg)	Height (mm)	Width (mm)	Depth (mm)	Central Air Inlet diameter (mm)	Smoke pipe diameter (mm)
KV 025 F 01	Flat glass, low	8	12	2 - 12		150 - 200	80	10	139	1057	460	552	100	180
KV 025 F 02	Flat glass, high	8	12	2 - 12		150 - 200	82	10	149	1257	460	552	100	180
KV 025 F P01	Angular glass, low	8	12	2 - 12		150 - 200	80	10	148	1057	462	565	100	180
KV 025 F P02	Angular glass, high	8	12	2 - 12		150 - 200	82	10	157	1257	462	565	100	180
KV 025 F R01	Radius glass, low	8	12	2 - 12		150 - 200	80	10	147	1057	462	563	100	180
KV 025 F R02	Radius glass, high	8	12	2 - 12		150 - 200	82	10	157	1257	462	563	100	180
KV 025 L	Flat glass, wide	10	14	2 - 14		150 - 230	82	10	182	1258	693	485	100	180
KV 025 M	Radius glass, wide	10	14	2 - 14		150 - 230	82	10	192	1262	710	540	100	180
KV 025 G 01	Insert with cupola		50	15 - 50		150 - 300	85	12	192	1190	492	830	120	180
KV 025 G 02	Insert with water exchanger	25	50	15 - 50	10	150 - 300	87	12	285	1439	492	830	120	180
KV 025 N 01	Insert with cupola		35	10 - 35		150 - 250	85	12	167	1190	492	690	120	180
KV 025 N 02	Insert with water exchanger	20	35	10 - 35	10	150 - 250	86	12	258	1439	492	690	120	180
KV 025 N 03	Insert with accumulative rings		35	10 - 35		150 - 250	85	12	167	941	492	690	120	180
KV 055 A	Flat glass, design – wide	12	18	6 - 18		150 - 250	82	12	225	1369	974	520	120	180
KV 055 B	Flat glass, design	10	16	4 - 16		150 - 230	82	12	200	1369	754	520	120	180
KV 055 L / R	Design – corner left / right	10	16	4 - 16		150 - 230	82	12	185	1369	744	538	120	180
KV 075 01 / 02	Single glass/double glass	6	10	2 - 10		100 - 180	82	10	126	1057	466	397	100	150
KV 075 W	Insert with water exchanger	12	16	4 - 16	8	150 - 200	83	12	233	1527	521	535	120	180

By virtue of their special construction, all the variants of KV025 fireplace inserts are suitable for built-in convection and accumulation-radiant fireplaces.

## Automatic regulation



RMT Reg300/310




RMT Reg200



RMT Reg100



RMT Reg050

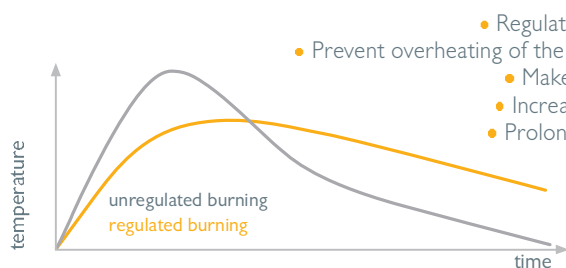

- Regulate and optimize heating process
- Prevent overheating of the stove or whole heating system
  - Make a better coziness in the room
  - Increasing efficiency of whole system
  - Prolonging the active burning process
    - Prolonging the firing interval
    - Indicate the need of firing
    - Increasing burning security
    - Decreasing wood Consumption

